

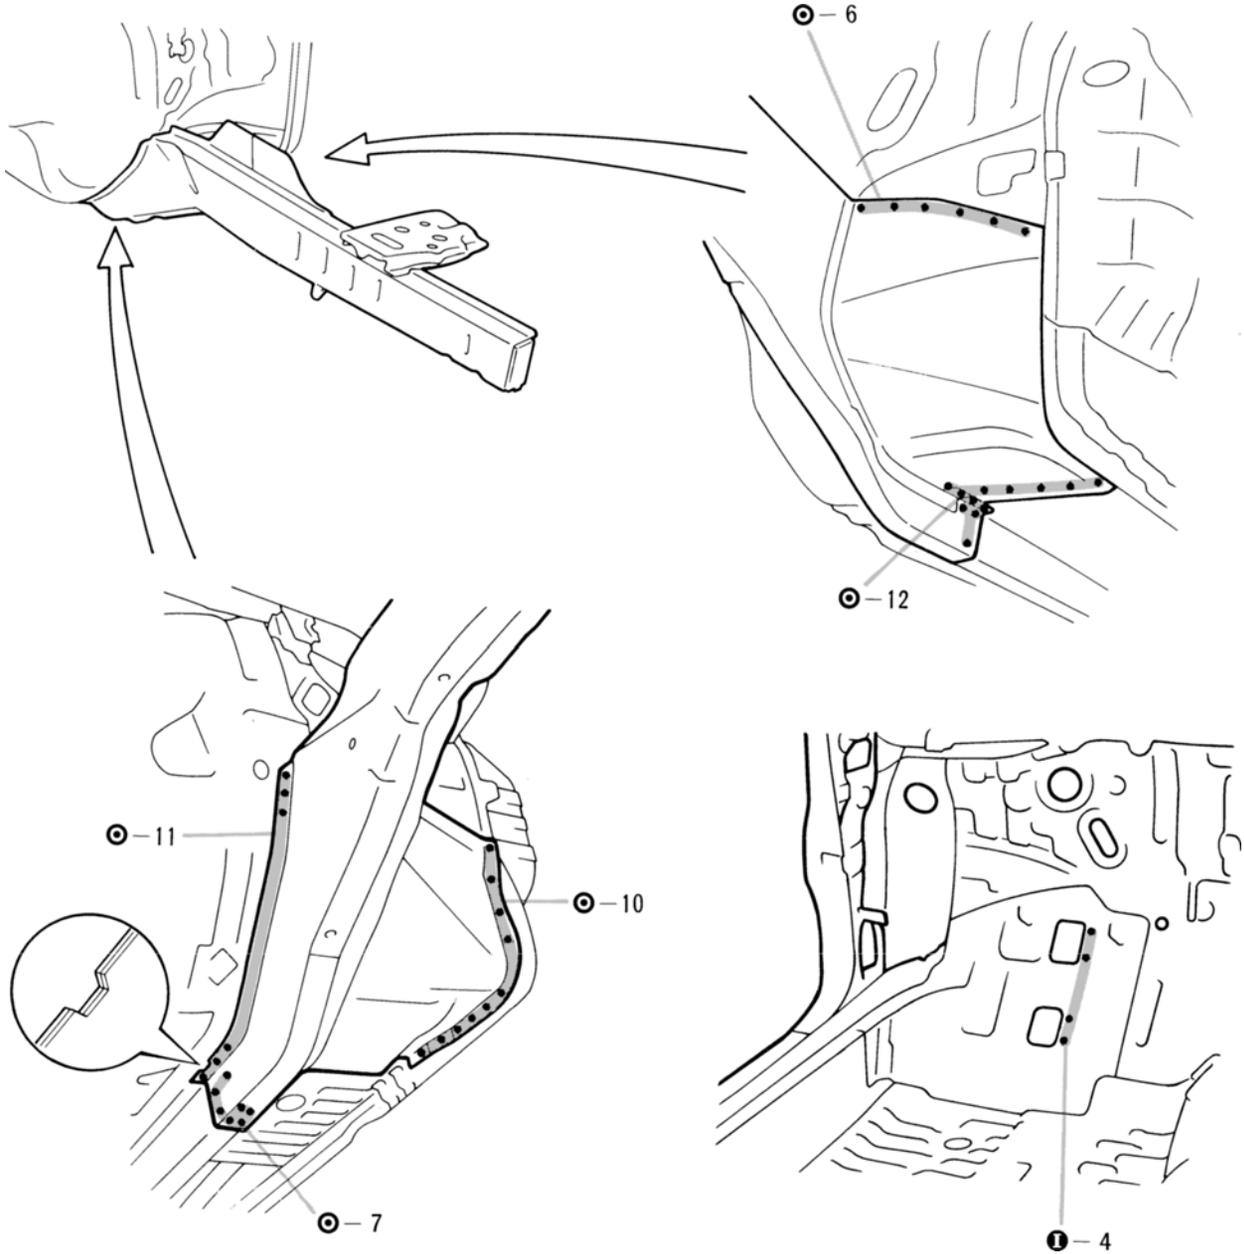


FRONT SIDE MEMBER (ASSY)

REMOVAL

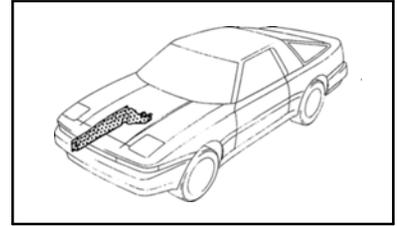

INSTALLATION

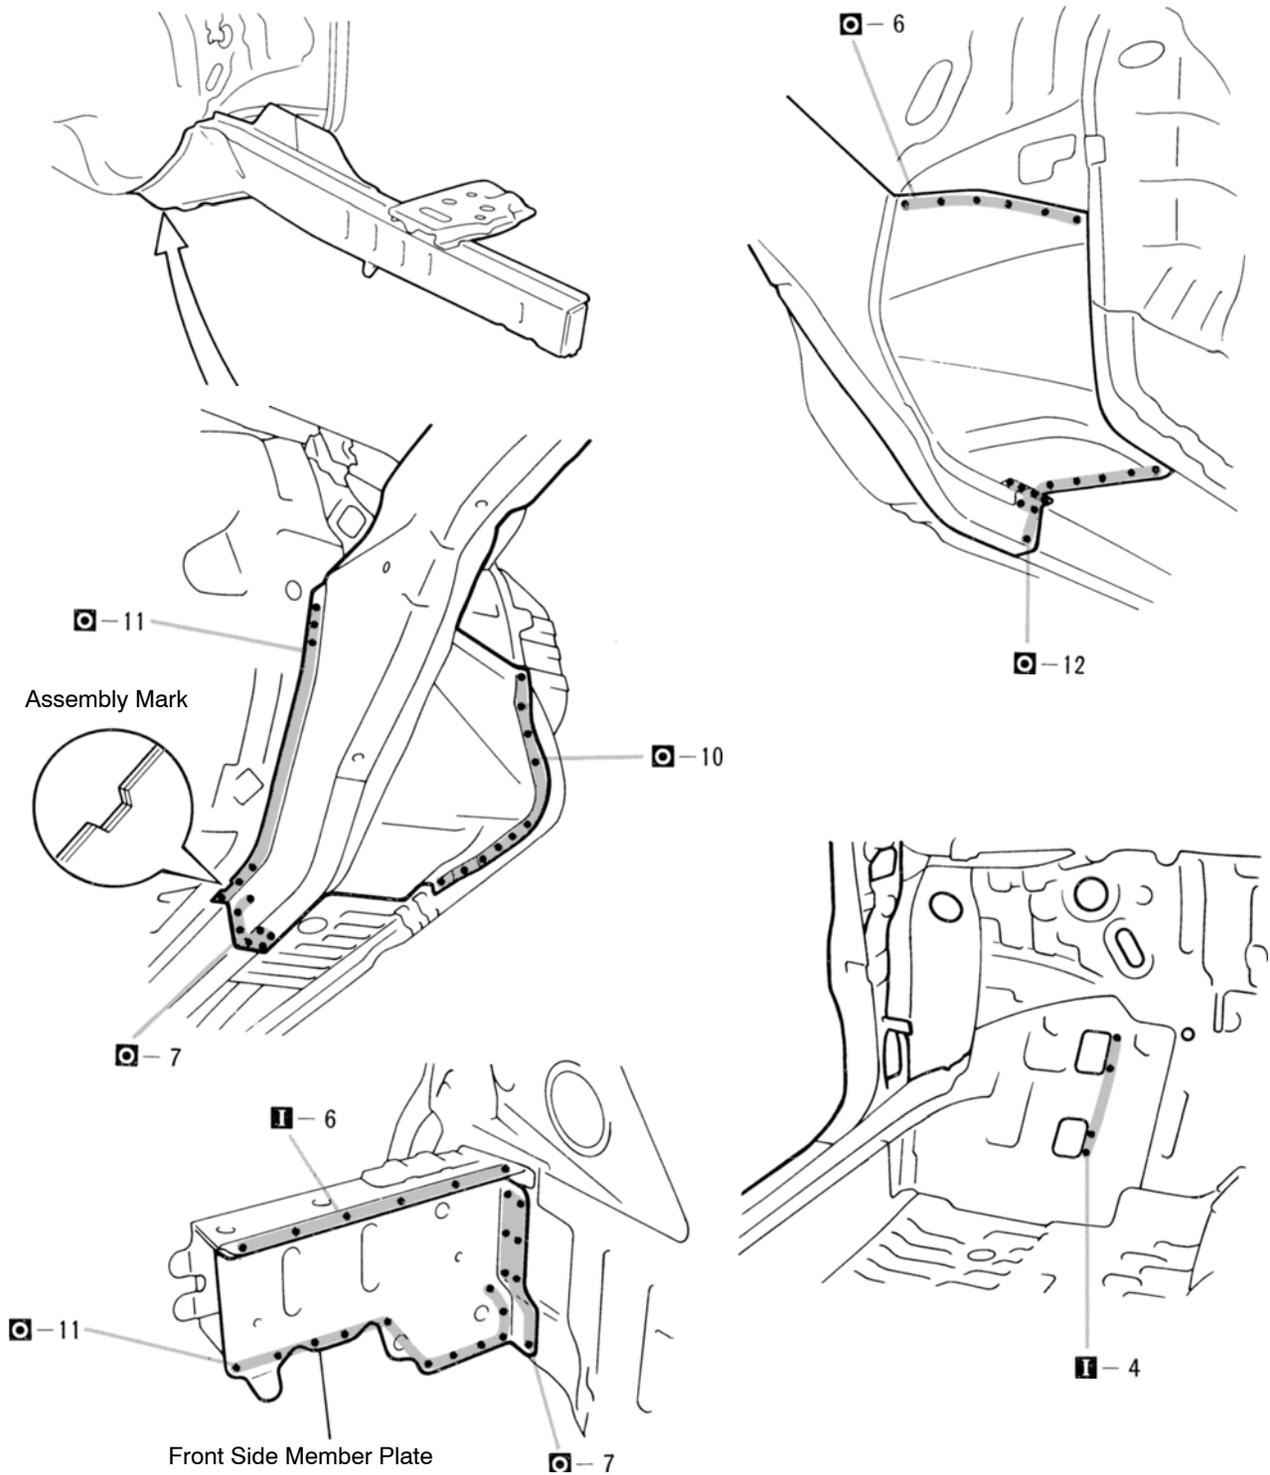

1. Temporarily install the new part and measure each part in accordance with the body dimension diagram.

NOTE: Make sure each measurement is correct, as this part effects the front wheel alignment.