


Wheel base 2,595 (102.17)

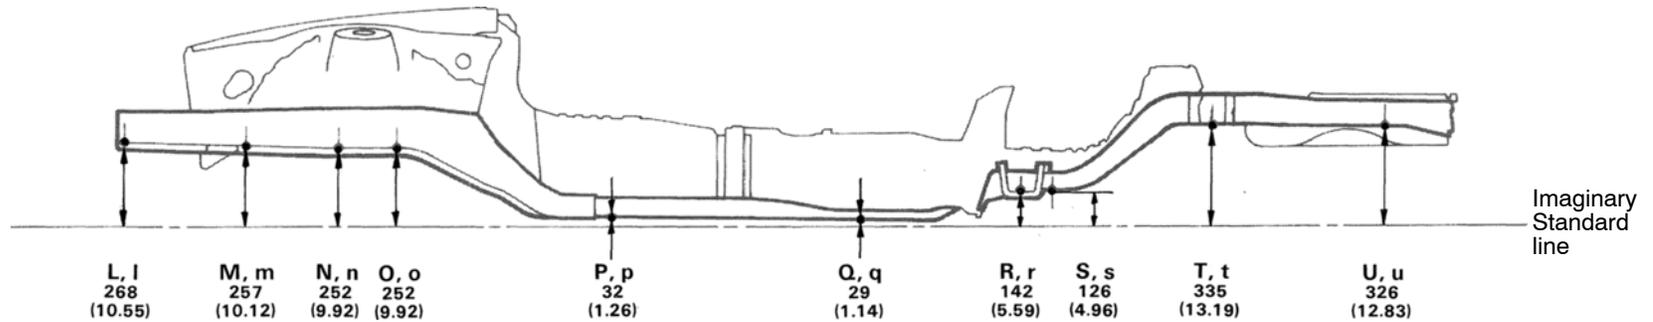

L, l	268	(10.55)	M, m	257	(10.12)	N, n	252	(9.92)	O, o	252	(9.92)	P, p	32	(1.26)	Q, q	29	(1.14)	R, r	142	(5.59)	S, s	126	(4.96)	T, t	335	(13.19)	U, u	326	(12.83)
------	-----	---------	------	-----	---------	------	-----	--------	------	-----	--------	------	----	--------	------	----	--------	------	-----	--------	------	-----	--------	------	-----	---------	------	-----	---------

mm (in)

BO1739

Symbol	Nomenclature	Hole dia	Symbol	Nomenclature	Hole dia.
L	Front side member bumper front installation hole-Lower	15 (0.59)	Q, q	Front floor No. 2 reinforcement standard hole	10 (0.39)
I	Front side member bumper front installation hole-Lower	17x15 (0.67x0.59)	R, r	Suspension member front installation hole-outer	19 (0.75)
M, m	Stabilizer front installation nut	11 (0.43)	S, s	Center floor side member standard hole	18 (0.71)
N, n	Suspension member front installation hole-lower	17 (0.67)	T, t	Suspension member rear installation hole	25x18(0.98x0.71)
O, o	Suspension member rear installation hole-lower	17 (0.67)	U, u	Rear floor side member standard hole	18 (0.71)
P, p	Front floor under reinforcement standard hole	10 (0.39)	—	—	—