




## BODY PANEL SEALING AREAS

For water-proofing and anti-corrosion measures, always apply body sealer to the body panel seams and hems of the doors, hood, etc.


### NOTE:

1. Prior to applying body sealer, clean the area with a rag soaked in white gasoline.
2. If weld-through primer was used, first wipe off any excess with thinner, and coat with anti-corrosion primer before applying body sealer.
3. Wipe off any excess body sealer with a rag soaked in white gasoline.

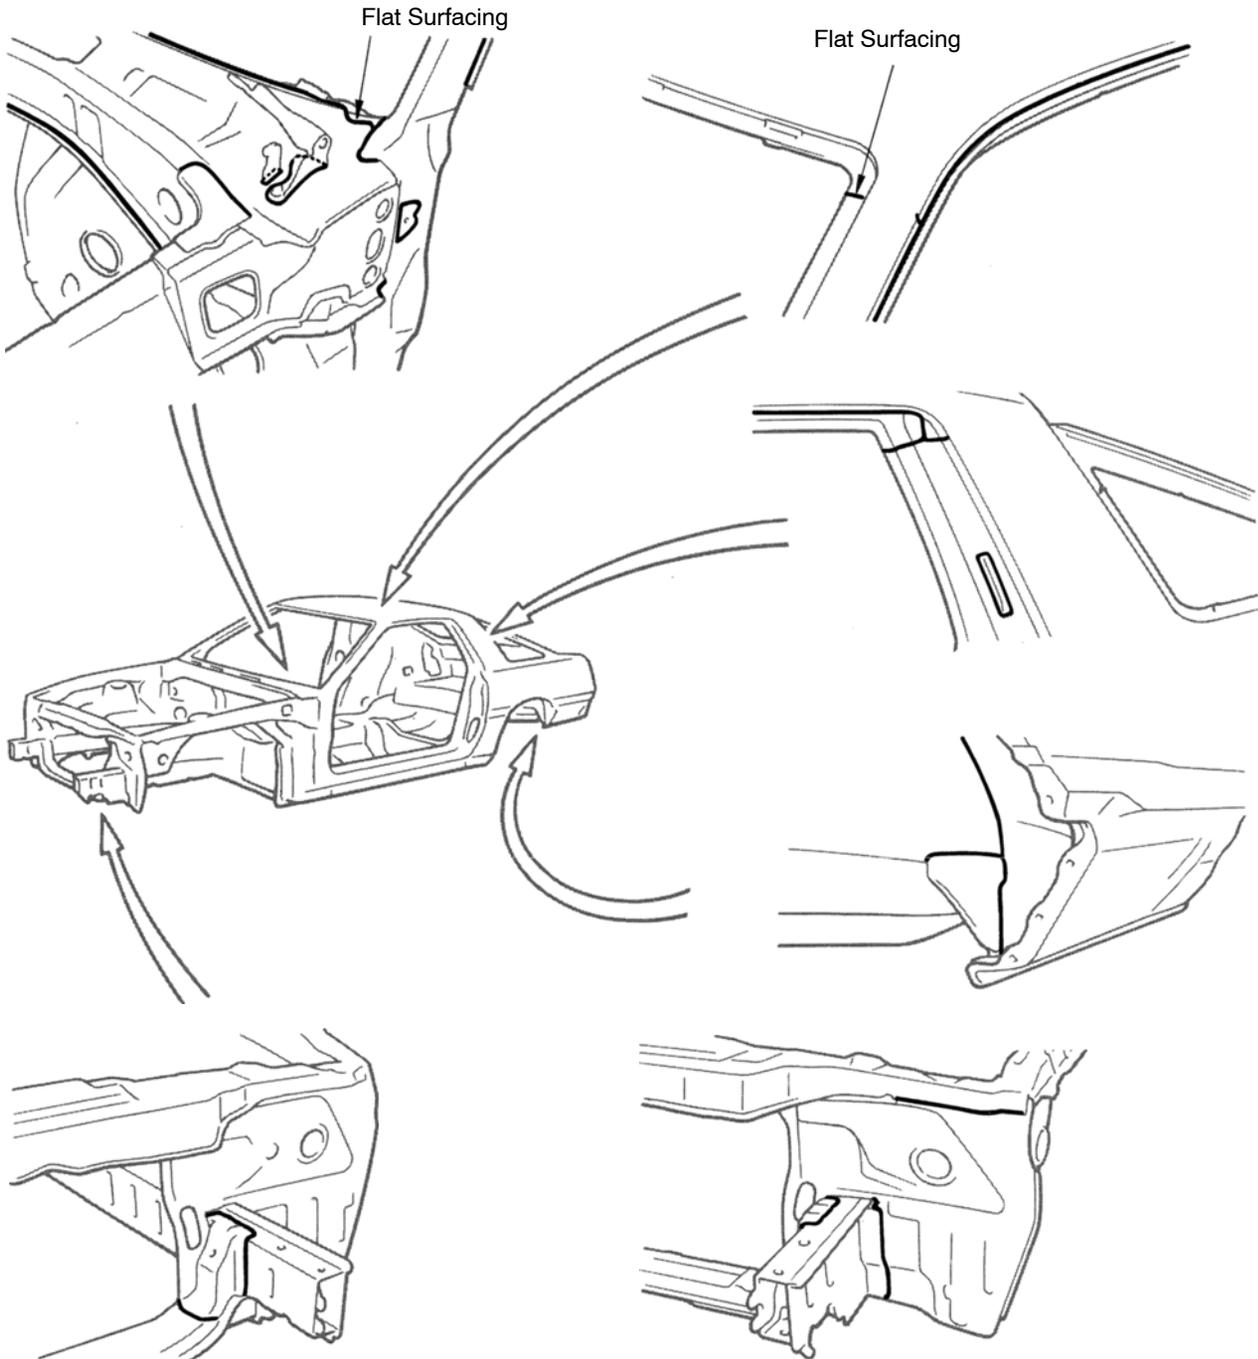

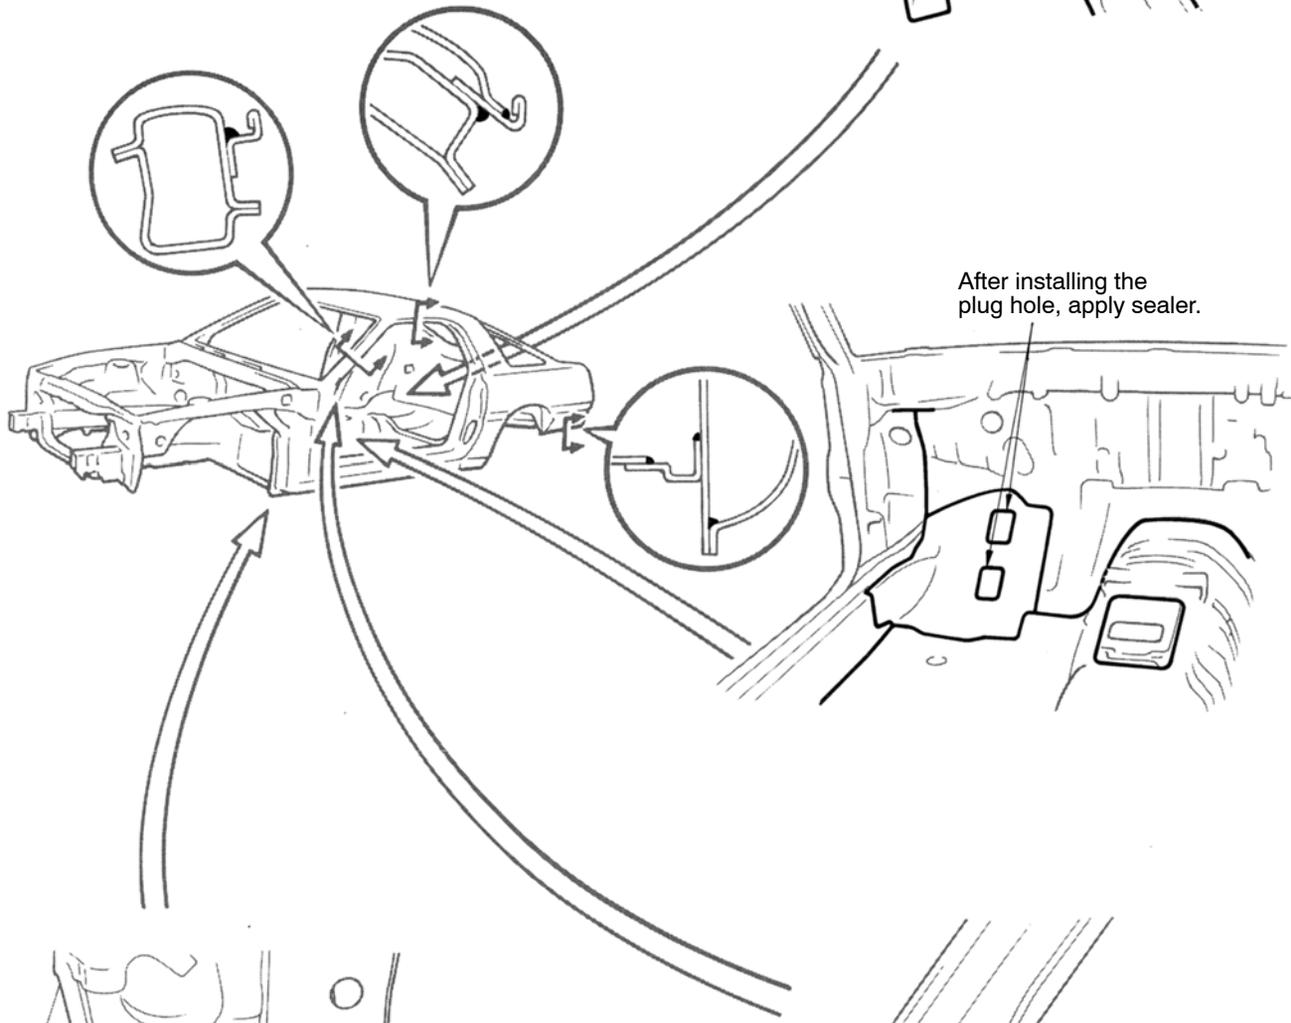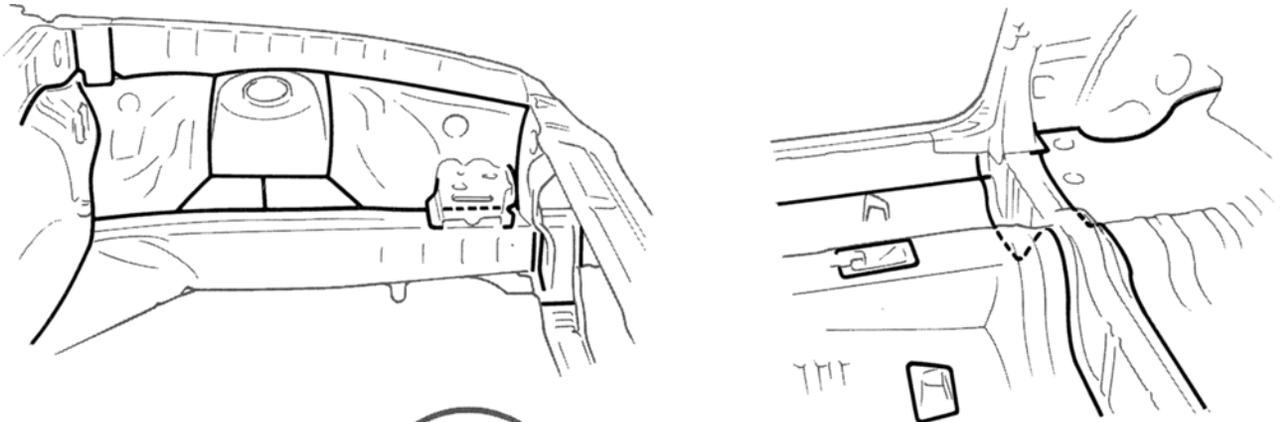


After installing the plug hole, apply sealer.

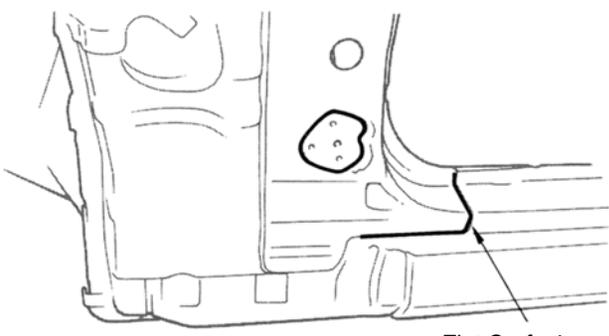

Flat Surfacing




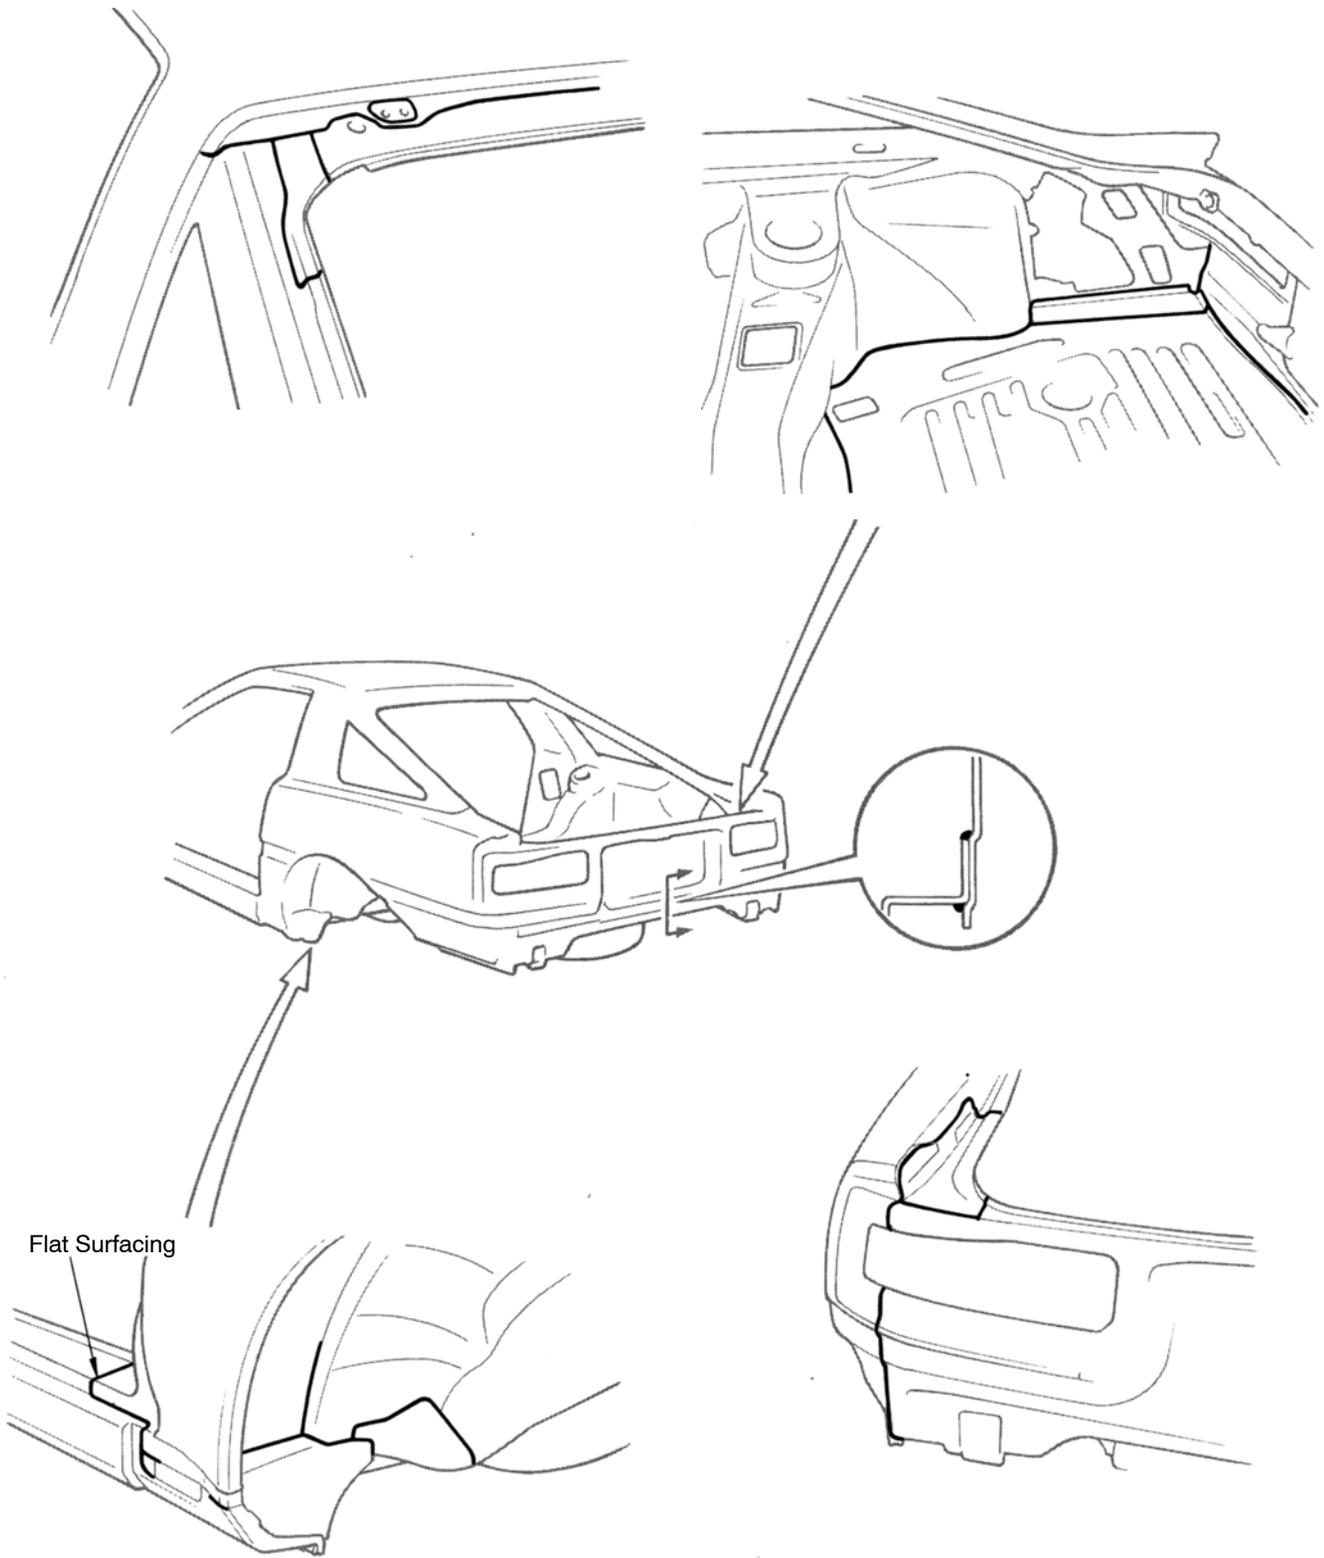



Hood



Front Door Panel

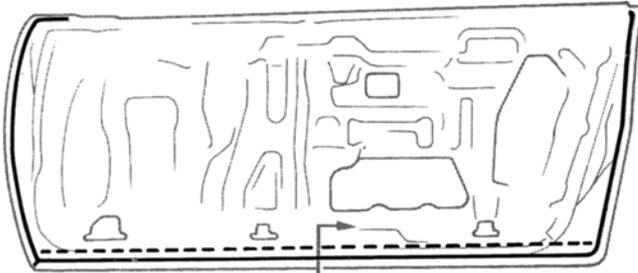


Do not close the drain hole.

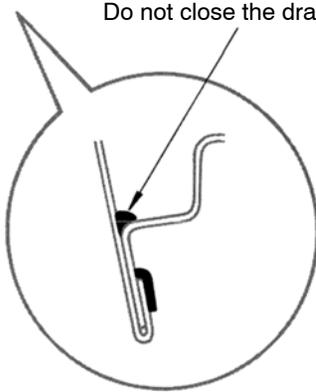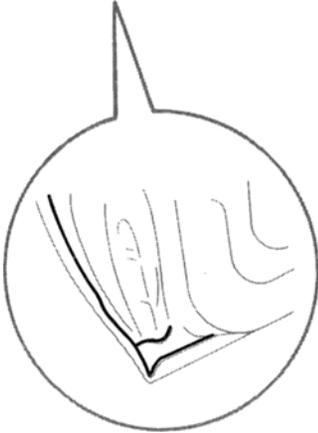


Back Door Panel



Flat surfacing

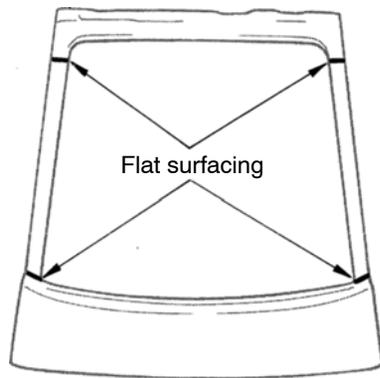

Fuel Inlet Box



Fuel Inlet Box Cover

