


BODY PANEL UNDERCOATING AREAS

To prevent corrosion and protect the body from damage by flying stones, always apply undercoating to the welded seams and wheel housings after chassis, under body or panel repair.

NOTE:

1. First wipe off any dirt, grease or oil with white gasoline.
2. Cover the surrounding areas with masking paper to avoid coating unnecessary areas. If other areas are accidentally coated, wipe off the coating immediately.
3. Do not coat parts which become hot, such as the tail pipe, or moving parts, such as the propeller shaft.
4. Besides the locations described below, apply undercoating to all weld points under the body to insure corrosion prevention.
5. Be sure to seal the edge of the flange of the member and bracket with undercoating.

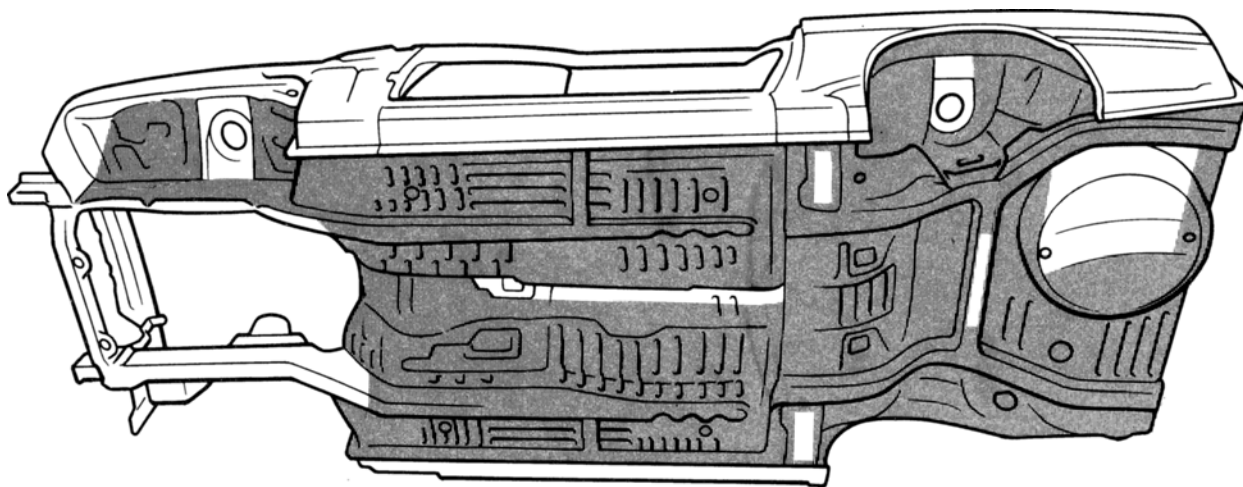

REFERENCE: Referring to the notes above, undercoating should be applied according to the specifications for your country.