



BODY PANEL SEALING AREAS

For water-proofing and anti-corrosion measures, always apply body sealer to the body panel seams and hems of the doors, hood, etc.

NOTE:

1. Prior to applying body sealer, clean the area with a rag soaked in white gasoline.
2. If weld-through primer was used, first wipe off any excess with thinner, and coat with anti-corrosion primer before applying body sealer.
3. Wipe off any excess body sealer with a rag soaked in white gasoline.

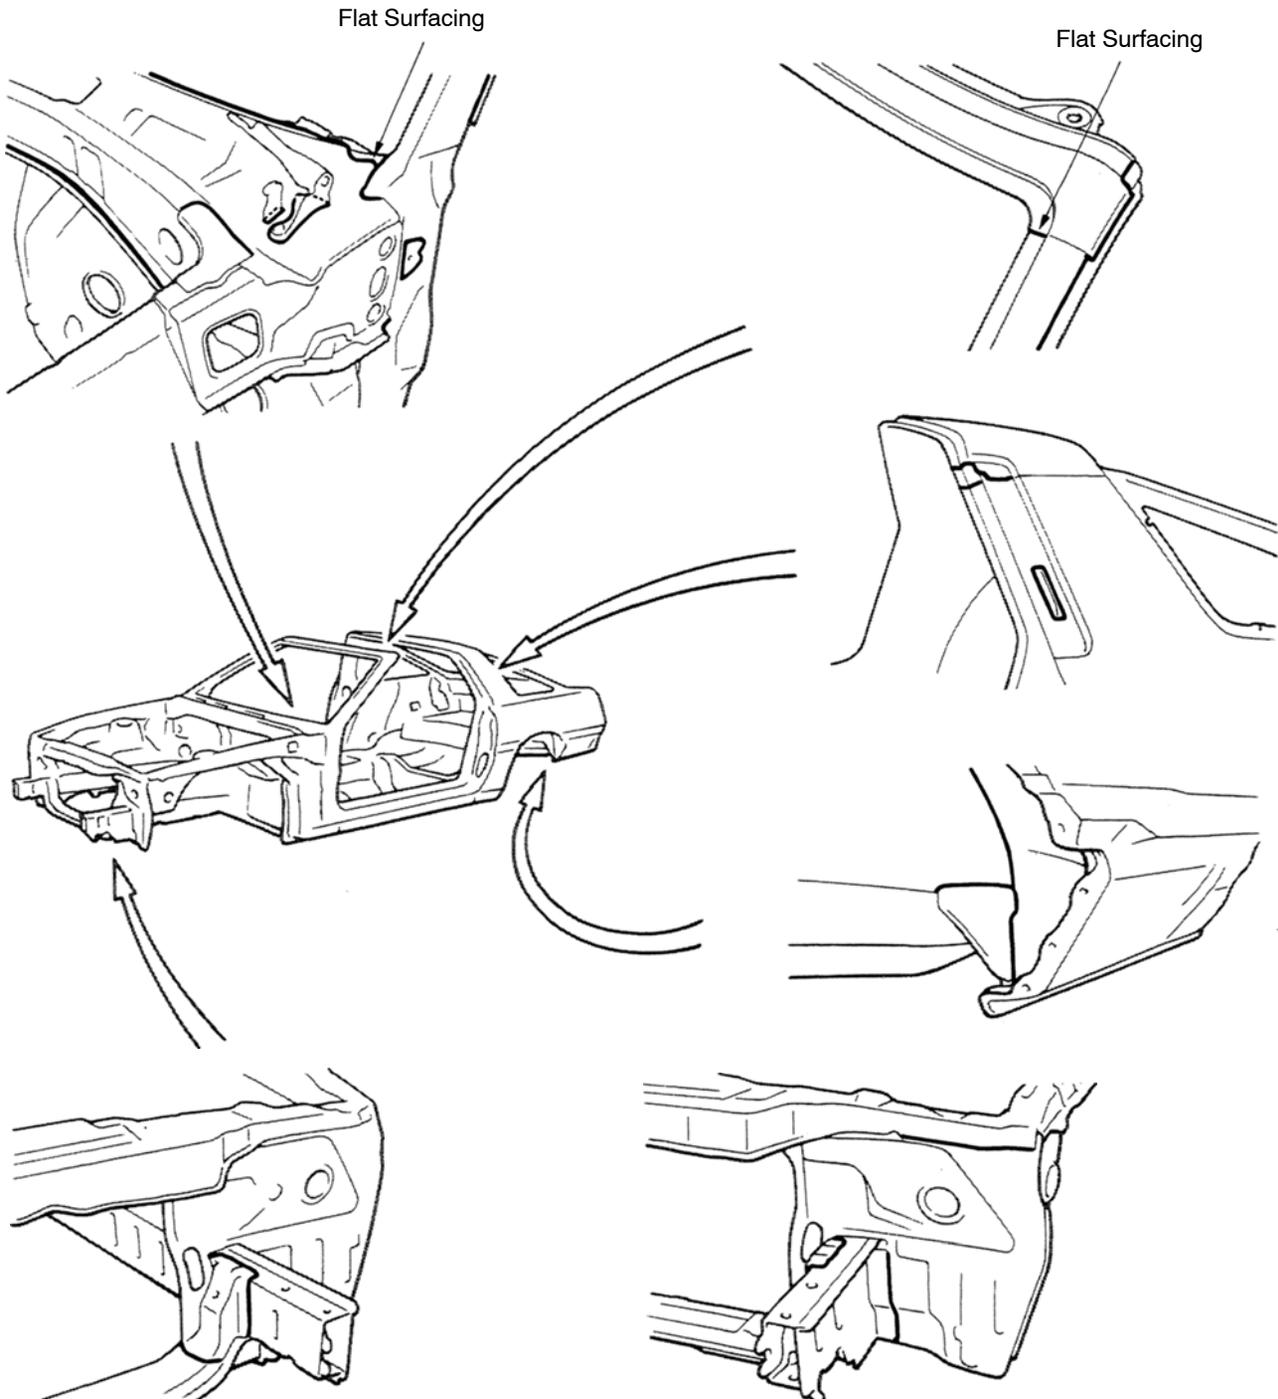

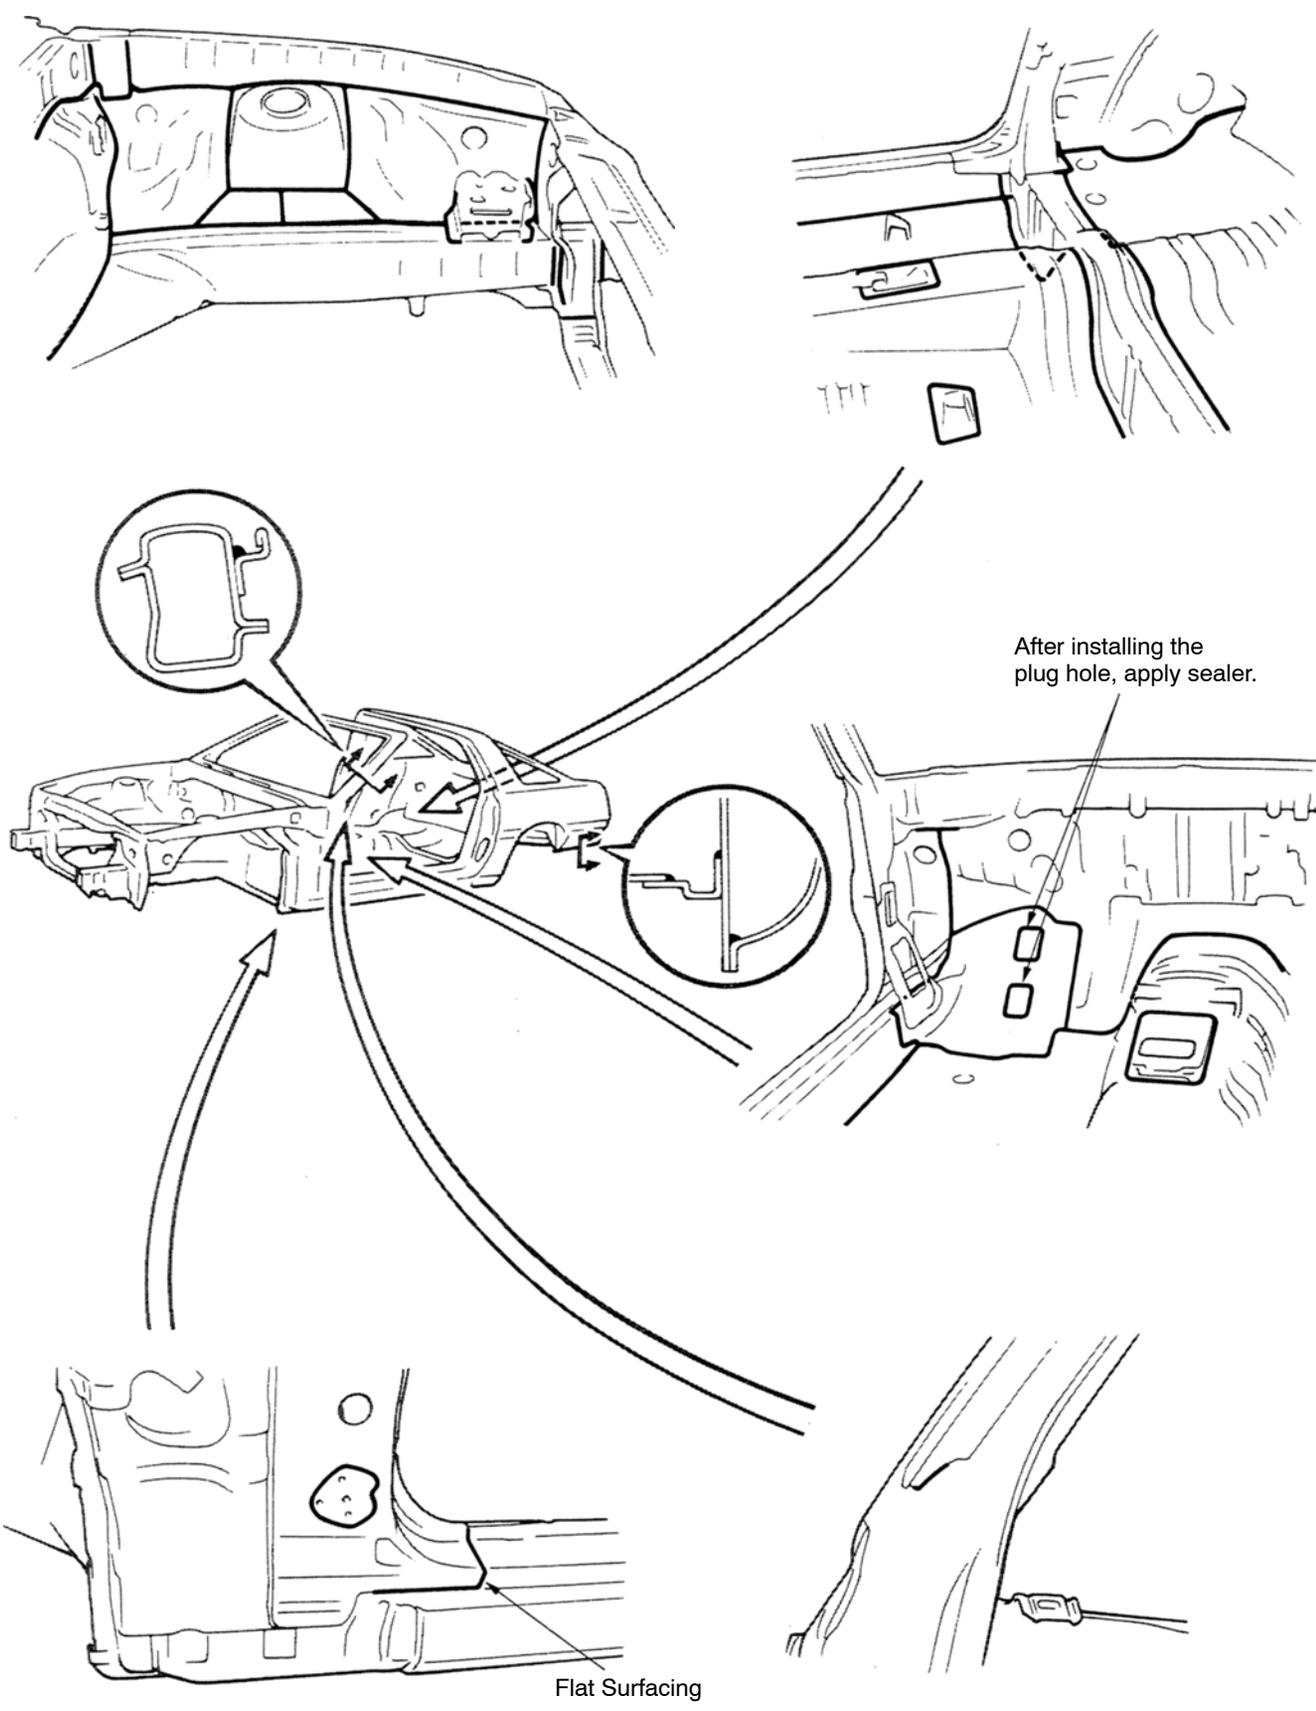

After installing the
plug hole, apply sealer.

Flat Surfacing